

AS3B0/AE3B0 型压接模具

AS3B0/AE3B0 CRIMPING APPLICATOR

产品介绍

Introduction

- **调节系统:** C.H./I.H.调节精度0.02mm, 调节范围2.0mm, 调节节奏感强, 刻度易识别, 满足您对压接质量的“苛刻”要求;
- **模块化结构:** 便于调整和维护, 超强柔性缔造无限拓展空间, 经济实惠;
- **快换机构:** 完美匹配KOMAX、AMP、MECAL等欧美品牌的半自动和全自动压接机;
- **技术文件:** 提供完整的使用、保养说明书, 如有要求, 也可提供机器能力研究、断面分析报告等文件;
- **超强抗锈:** 镀镍处理;
- **产品追溯:** 每个零件都拥有自己的ID。




• AS3B0

- **Adjustment :** Can be supplied either with a continuous or a wedge regulating head, providing a 0.02mm Resolution for C.H./I.H.and a 2.0mm range, meet your demands on crimping quality;
- **Modularized framework:** Can be adjusted and maintained conveniently;
- **Switch system:** Can be fitted to semi-automatic and fully automatic crimping machine for Occident brand such as KOMAX, AMP, MECAL and so on;
- **Technical documentation:** You can get a complete technical documentation containing all the information needed to safely use and correctly maintain the equipment. Upon request, a capability study & Cross-section Analysis can be provided;
- **Strong resistance to rust:** Surface plating (Ni) ;
- **Production tracking:** Laser marking for every part.

技术参数

Specifications

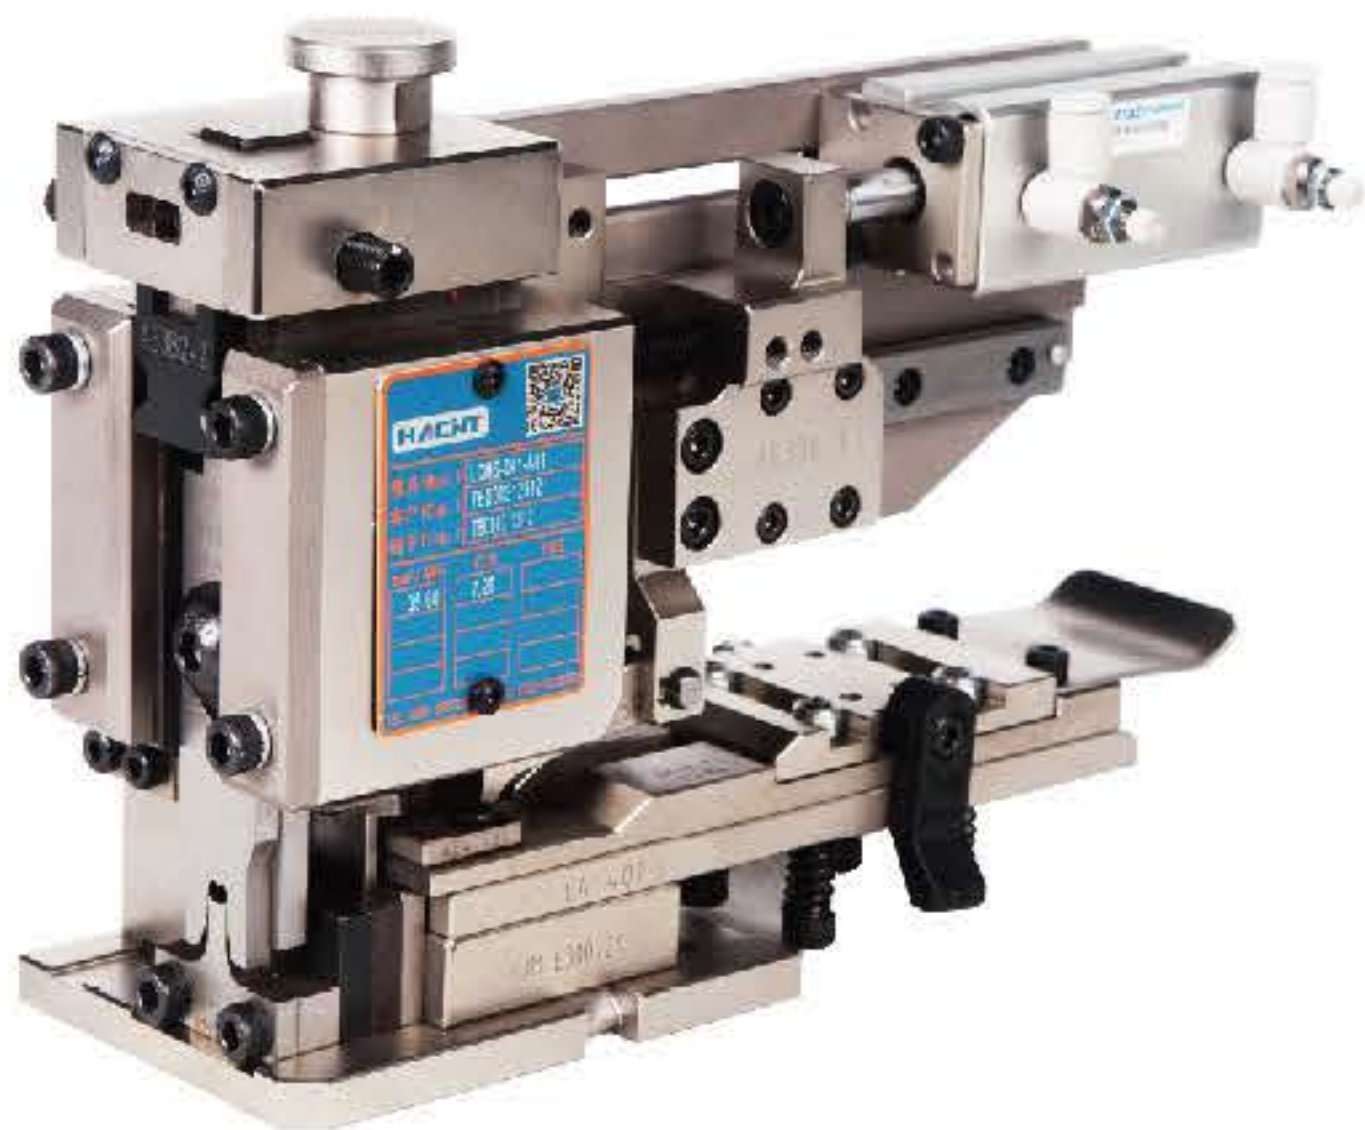

• AE3B0

型 号	Type	AS3B0	AE3B0
行 程	Stroke	40mm	
料带形式	Feed Type	横向Side Feed	纵向End Feed
闭合高度	Shut Height	135.78mm(5.346in)	
重 量	Weight	4kg	
线径范围	Wire Cross Sections	0.08 ~ 6mm²(9~28AWG)	
外形尺寸	Dimensions	L195 × W155XH70mm	
适应端子料厚	Terminal thickness	1.2mm(max)	
送料机构	Feeding system	气动 pneumatic	
送料步距	Terminal Pitch	40mm(max)	

★ 相关产品

Related Products

- HBQ-2040EB 型端子压接机
- HBQ-2040EB Crimping Machine
- HBQ-X4040EB 型端子压接机
- HBQ-X4040EB Crimping Machine
- HBQ-8040E 型端子压接机
- HBQ-8040E Crimping Machine